


BD

For hedge mowers and excavators 3.0-10.0 ton

The forest cutting disc bar is used for strong and fast pruning. The maximum diameter of shear is about 100-150 mm.

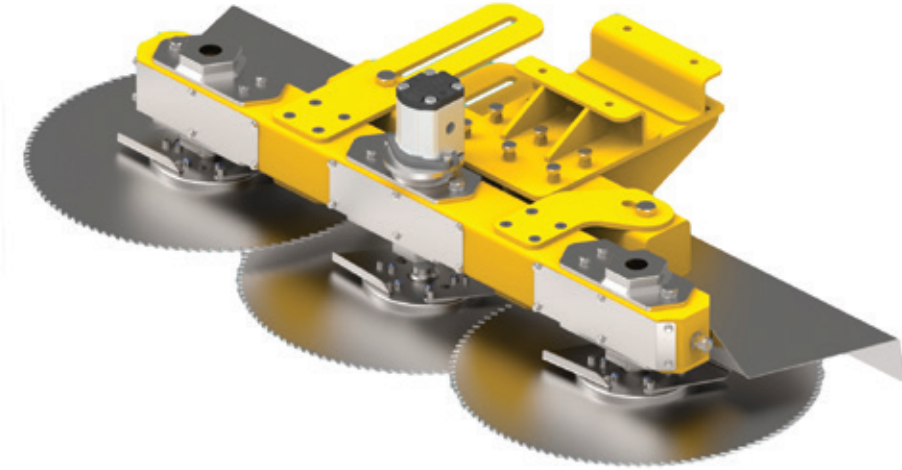

| | BD2 | BD3 | BD4 |
|--|-----------------|-----------------|-----------------|
| Weight kg/lbs | 73 161 | 107 236 | 144 317 |
| Disc diameter cm/inch | 60 23,6 | 60 23,6 | 60 23,6 |
| Discs | 2 | 3 | 4 |
| Engines | 1 | 1 | 1 |
| Width cm/inch | 122 48 | 156 62 | 204 80 |
| Cut cm/inch | 10-15 4-6 | 10-15 4-6 | 10-15 4-6 |
| RPM max | 3000 | 3000 | 3000 |
| Max pressure bar/psi (min-max) | 150 2.200 | 150 2.200 | 150 2.200 |
| Min-max oil flow L/min - gal/min | 40-150 11-40 | 40-150 11-40 | 40-150 11-40 |

Technical features and standard equipment

- Hydraulic motor
- Steel plate for excavator or boom mower mounting hitch
- Protection blades for transport

Accessories

- Mounting hitch (pins version) 1.2-4.0 ton
DOC101-201-202
- Pins kit 1.2-4.0 ton
- Quick hitch 1.2-4.0 ton
- Mounting hitch (pins version) 4.1-8.0 ton
DOC303-302-400-500-600-VFR
- Pins kit 4.1-8.0 ton
- Quick hitch 4.1 - 8.0 ton
- Mounting hitch (pins version) 8.1-12.0 ton
- Pins kit 8.1-12.0 ton
- Quick hitch 8.1 - 12.0 ton
- Hoses kit Lg. 2 meters
- Valves block