

SERIE 3


For tractors 20–30 hp

Hobby and gardening



SERIE 3

A (mm)	1.250
B (mm)	1.700
C (mm)	2.300
D (mm)	2.200
E (mm)	250

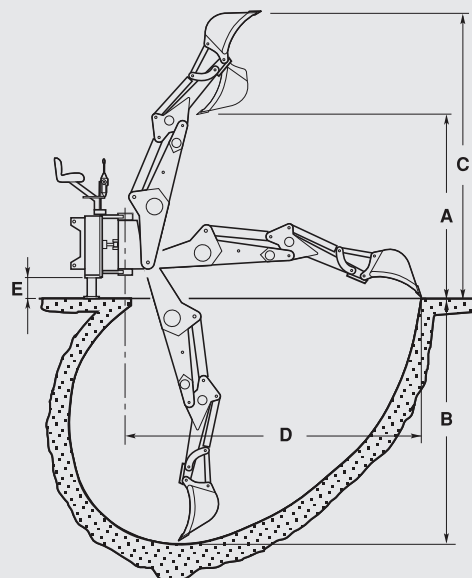

SERIE 3

Digging depth mm	1.700
Rotation angle	180°
Moving frame width mm	1.100
Weight kg	285
Oil tank L	15
Standard bucket mm	250 (14 l)
Tooth tearing resistance kg	1.500
Digging force with auxiliary boom kg	700

Technical features and standard equipment

- Sideshifting backhoe with mechanical locking, applicable to the three-point hitch of the hydraulic boom
- 180° central rotation by 1 cylinder (patented)
- Independent hydraulic stabilisers with block valves
- Independent system with 4 cm³/rev., pump, multiplier, 15-lit built-in tank, oil strainer and hydraulic oil
- Monoblock distributor with 40 lt/min flow rate and finger-tip control levers
- Flow rate 6 l/min
- Max working pressure: 190 bar
- Standard bucket: 250 mm
- Joints with pins and bushes of case-hardened and tempered steel
- Chrome-plated double-liner cylinder rods
- Sanding and polyester powder coating
- Stiffening tractor frame category 1

Accessories on request

- Hydraulic locking TI



Stiffening tractor frame
Category 1 - Included

Terminal tools



BUCKET
250 mm
300 mm
400 mm



DITCH CLEANING BUCKET
800 mm



TRAPEZOIDAL BUCKET
550 mm