

SERIE 4


For tractors 35-55 hp

Gardening - Wine growing - Horticulture and green maintenance



SERIE 4

A (mm)	1.650
B (mm)	2.200
C (mm)	2.625
D (mm)	2.580
E (mm)	260

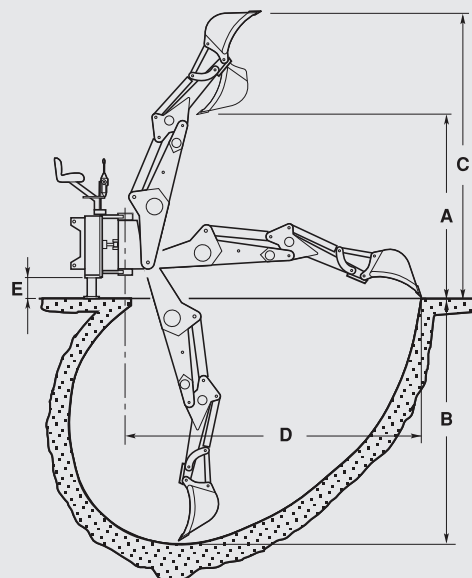


SERIE 4	1200	1400
Digging depth mm	2.200	2.200
Rotation angle	180°	180°
Moving frame width mm	1.200	1.400
Weight kg	375	410
Oil tank L	22	22
Standard bucket mm	300 (25 l)	300 (25 l)
Tooth tearing resistance kg	2.200	2.200
Digging force with auxiliary boom kg	1.000	1.000

Technical features and standard equipment

- Sideshifting backhoe with mechanical locking, applicable to the three-point hitch of the hydraulic boom
- 180° central rotation by 1 cylinder (patented)
- Independent hydraulic stabilisers with block valves
- Independent system with 8 cm³/rev., pump, multiplier, 22-lt built-in tank, oil strainer and hydraulic oil
- Monoblock distributor with 40 lt/min flow rate and finger-tip control levers
- Flow rate 15 l/min
- Max working pressure: 190 bar
- Standard bucket: 300 mm
- Boom locking tensioners
- Joints with pins and bushes of case-hardened and tempered steel
- Chrome-plated double-liner cylinder rods
- Sanding and polyester powder coating
- Stiffening tractor frame category 1

Accessories on request

- Installation 1: ditch cleaning titling buckets 45°
- Installation 2: hydraulic mulcher (installation 1 included)
- Hydraulic mulcher 800 mm T1 80 REV
- Remote control on the cab
- Skid steer loader application
- Hitch coupler for articulated backhoe-loaders, backhoe loaders, telescopic loaders

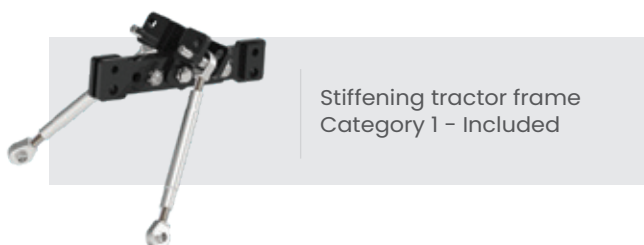

Terminal tools




BUCKET
250 mm
300 mm
400 mm
500 mm
600 mm



DITCH CLEANING BUCKET
800 mm
1000 mm
1200 mm



45° TITLING BUCKET
800 mm
1000 mm
1200 mm



TRAPEZOIDAL BUCKET
670 mm