

SERIE 5


For tractors 55-90 hp

Semiprofessional



SERIE 5

A (mm)	1.880
B (mm)	2.600
C (mm)	2.850
D (mm)	2.800
E (mm)	310

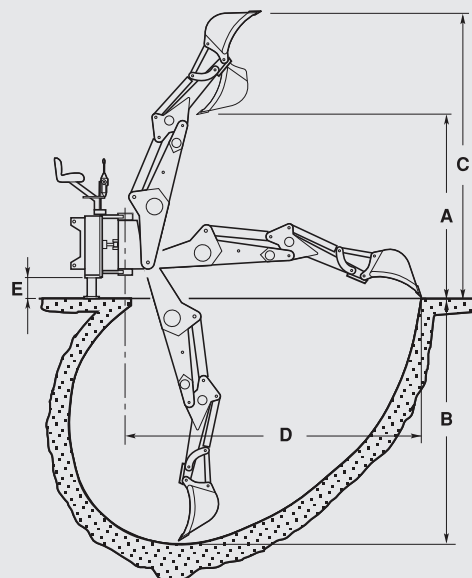

SERIE 5

Digging depth mm	2.600
Rotation angle	180°
Moving frame width mm	1.500
Weight kg	580
Oil tank L	35
Standard bucket mm	300 (25 l)
Tooth tearing resistance kg	2.400
Digging force with auxiliary boom kg	1.100

Technical features and standard equipment

- Sideshifting backhoe with hydraulic locking, applicable to the three-point hitch of the hydraulic boom
- 180° central rotation by 1 cylinder (patented)
- Independent hydraulic stabilisers with block valves
- Independent system with 12 cm³/rev., pump, multiplier, 35-lt built-in tank, oil strainer and hydraulic oil
- Monoblock distributor with 40 lt/min flow rate and finger-tip control levers
- Flow rate 20 l/min
- Max working pressure: 190 bar
- Standard bucket: 300 mm
- Boom locking tensioners
- Joints with pins and bushes of case-hardened and tempered steel
- Chrome-plated double-liner cylinder rods
- Sanding and polyester powder coating
- Stiffening tractor frame category 1 and 2

Accessories on request

- Installation 1: auger, grab, multipurpose fork
- Installation 2: hydraulic hammer, ditch cleaning titling buckets 45°, hydraulic rotator + multipurpose fork or Grab (installation 1 included)
- Installation 3: hydraulic mulcher (installation 2 included)
- Hydraulic mulcher 800 mm T1 80 REV
- Remote control on the cab
- Skid steer loader application
- Hitch coupler for articulated backhoe-loaders, backhoe loaders, telescopic



Stiffening tractor frame
Category 1 and 2 - Included

Terminal tools



BUCKET

250 mm
300 mm
400 mm
500 mm
600 mm



DITCH CLEANING BUCKET

800 mm
1000 mm
1200 mm



45° TITLING BUCKET

800 mm
1000 mm
1200 mm



TRAPEZOIDAL BUCKET

670 mm



GRAB

125 dm³



MULTIPURPOSE FORK

650 mm



HYDRAULIC ROTATOR

BR10



HYDRAULIC HAMMER

62 kg



AUGER

TR1



DRILL BITS (Ø x lg.1000 mm)

150
200
250
300
400